

# ALE NTEP Milligram


Series

## Intelligent-Lab™ Milligram Balance

0.001 g



- Vibra® Tuning Fork Sensor
- Reads in g, ct, lb, oz t, GN, dwt, mom, mg, oz
- Configurable RS232 Interface, Windows® Compatible
- Checkweighing, %, Animal Weighing, Accumulation, Density, GLP Compliant Formulation, Statistics, Specific Gravity
- Counting Feature NTEP Approved to 0.01 g for Pharmacy Filling
- Bar Graph Indicator for Capacity Usage
- HI-LO-GO Comparative Function
- Below Balance Weighing with Optional Kit
- Free Programmable Keys

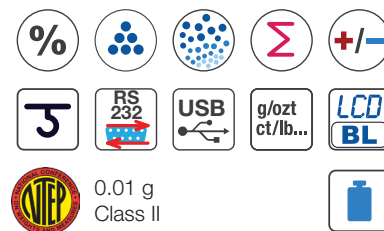

Weighing Technology

A Higher Level of Precision . . . A Higher Level of Performance

Made in Japan



Weighing Technology

A Higher Level of Precision . . . A Higher Level of Performance

# ALE Milligram

## Series

Model	ALE-223	ALE-323	ALE-623
Capacity	220 g	320 g	620 g
Readability	0.001 g, NTEP 0.01 g CLASS II		
Calibration	External calibration Class II		
Repeatability (Std. Dev.)	± 0.001 g		
Linearity	±0.001 g		
Stabilization Time	≤ 1.6 seconds		
Weighing Units	g, ct, lb, oz t, GN, dwt, mom, mg, oz		
Functions	Specific Gravity, Parts Counting (NTEP for pill counting only), %, Density, Checkweighing (limit function), Animal Weighing, GLP Compliant Formulation, Statistics, Accumulation, Below Balance Weighing		
Tare Range	To capacity by 100% subtraction		
Power Source	Input: AC/DC Adapter, 100 - 240 VAC, 50 - 60 Hz, Output: 6 VDC, Dry Cell Batteries (4 x AA, Not Included)		
Construction	Die cast aluminum base, ABS housing, Stainless Steel Platter, Anti-Static Glass Draft Shield		
Display	Large, easy to read 5/8" (16 mm) LCD display with backlight and icons		
Pan Size	118 mm, 4.65" diameter		
Draft Shield Internal Dimensions (W x D x H)	5.9 x 5.9 x 7.87 inches / 150 x 150 x 200 mm		
Overall Dimensions (W x D x H)	7 x 9 x 3 inches / 180 x 230 x 75 mm (Not including draft shield)		
Operating Environment	41 °F to 95 °F / 5 °C to 35 °C Temperature fluctuation ≤ 2 °C / hour Humidity 50% to 85% RH		
Connectivity	Output RS232 interface, USB Type B, with free RTS data collection software for Windows®		
Net Weight	2.86 lb / 1.3 kg		
Shipping Weight	6.5 lb / 2.94 kg		
Options	Ethernet or Relay Contact (only one option per unit), Specific Gravity Measurement Kit, Underweighing Hook		

Features	Benefits
Easy calibration	Calibration is simple, ensuring that the balance will be calibrated often during use
Dedicated print button (output)	Easy data transfer to printer or computer
Large stainless steel pan	Allows for easy weighing of large objects
Spill ring	Protects against damage to electronic components
Adjustable bright, backlit LCD display	Easy to read in all lighting conditions including bright sunlight
Multiple weighing units	Allows flexibility of weighing
In use dust cover	Protects balance against spillage and contamination
4 Leveling feet for adjustment	The balance remains level for accurate results even on uneven working surfaces
Configurable RS232 interface and USB	Allows communication with peripheral data collection and printing instruments
Free Keys	Allows often used applications to be "one key" accessible
Dry Cell Battery Power	Allows for portability

Manufactured in Japan for Intelligent Weighing Technology, Inc. in an ISO 9001 certified facility

Direct: 805-642-3034 • [www.intelligentwt.com](http://www.intelligentwt.com)

Rev: ALE-MIL 09-18